

NOTE: SEE DETAIL VIEW 1 BELOW TO ENSURE STAINLESS STEEL TUBING IS CONNECTED TO CORRECT PORTS.

NOTE: PRODUCT WATER TUBING SHALL BE INSTALLED INTO THE TOP OF A PROPERLY VENTED TANK.

NOTE: CHARGE ACCUMULATOR HERE. NORMAL PRESSURE IS ~60 PSIG.



NOTE: BRINE SHOULD BE DISCHARGED ABOVE WATERLINE TO AID IN TROUBLESHOOTING.

NOTE: OPTIONAL Z-ION WILL REPLACE THE CARBON FILTER BOWL. SEE DETAIL VIEW 2.

NOTE: FEED PUMPS TO BE INSTALLED IN PARALLEL AND MOUNTED AS LOW AS POSSIBLE (NO MORE THAN 1M/3FT ABOVE WATERLINE).

NOTE: DEDICATED SEAWATER SUPPLY VIA CUSTOMER SUPPLIED ½" OR ¾" FWD FACING SCOOP STRAINER. MOUNT LOW AND AWAY FROM HEAD DISCHARGE

KEY: LIST OF SYMBOLS		
SYMBOL	USE	DESCRIPTION
	PRESSURE GAUGE TUBING	BLACK 1/4" VINYL
	LOW PRESSURE INLET HOSES	5/8" CLEAR BRAIDED VINYL
	LOW PRESSURE BRINE DISCHARGE HOSE	5/8" CLEAR BRAIDED VINYL
	PRODUCT WATER TUBING	BLACK 1/4" VINYL
	HIGH PRESSURE TUBING	STAINLESS STEEL TUBING

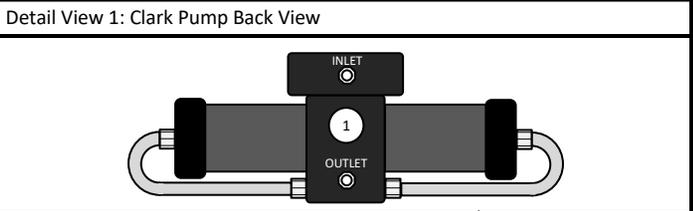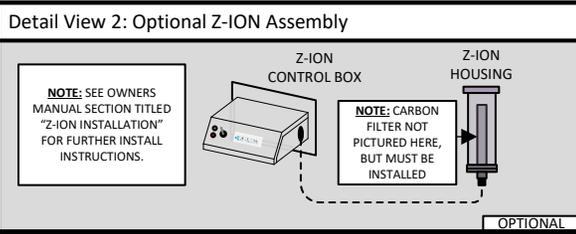

Revision History:

Rev No:	Date:	Description:
A	01/04/2023	Initial Plumbing Diagram for Cape Horn Extreme 330 System.

Cape Horn Extreme 330

Revision: A
 Rev Date: 02/10/2023
 Print Date: 02/10/2023
 Drawn by: JCM

Katadyn Desalination